NICHOLSON™

WOOD PROCESSING EQUIPMENT

A1

SLIDING RING DEBARKER

The Nicholson A1 is the fastest, most heavily built sliding ring debarker in our product range and is ideal for severe debarking applications where optimum debarking quality and high capacity is required.

The A1 is offered in a range of sizes and configurations. Nicholson's sales team has the experience to guide you through choosing the best options for your specific application.

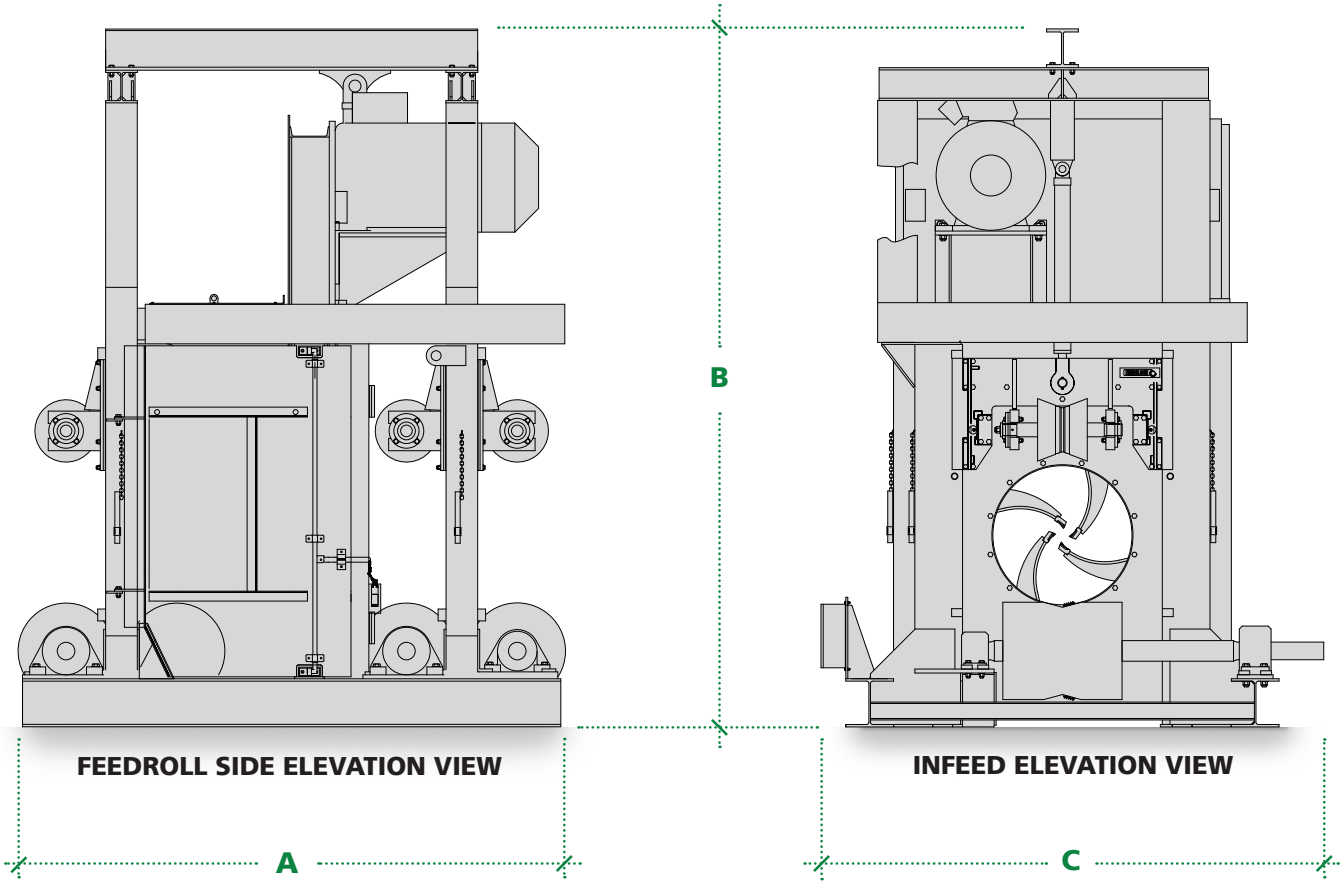

FEEDROLL SIDE ELEVATION VIEW

INFEED ELEVATION VIEW

TECHNICAL DATA	Units	27”	35”	44”	
A	in (mm)	172 (4,369)	186 (4,724)	245 (6,223)	
B	in (mm)	144 (3,658)	168 (4,267)	206 (5,232)	
C	in (mm)	98 (2,489)	120 (3,048)	142 (3,607)	
Log diameter	in (mm)	3.5-25.0 (89-635)	4.0-33.0 (102-838)	4.5-42 (114-1,067)	
Min. log length	in (m)	94 (2.39)	104 (2.64)	125 (3.18)	
Debarker weight	lbs (kg)	26,500 (12,045)	45,000 (20,455)	66,000 (30,000)	
Max. feed speed*	fpm (mpm)	225 (68)	200 (61)	175 (53)	

*Feed speed for optimal conditions. Consult with your Nicholson distributor for application specific feed speeds.
As all Nicholson product is subject to a continuous improvement program, specifications may change without prior notice.

NORTH AMERICA +1-844-227-5633 forestsales@nicholsonmfg.com +1-250-656-3111

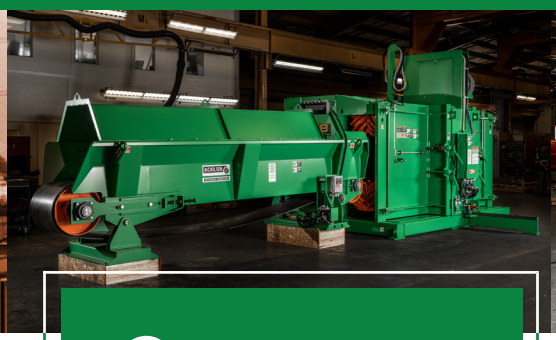

NICHOLSON MANUFACTURING LTD.
9896 Galaran Road
Sidney, BC, Canada V8L 4K4

NICHOLSON™

www.debarking.com

A1 Ring Debarker-1000 (CA EN) 01/2023
© 2023 Nicholson Manufacturing Ltd.
A Kadant Company