NICHOLSON™

WOOD PROCESSING EQUIPMENT

A6

SLIDING RING DEBARKER

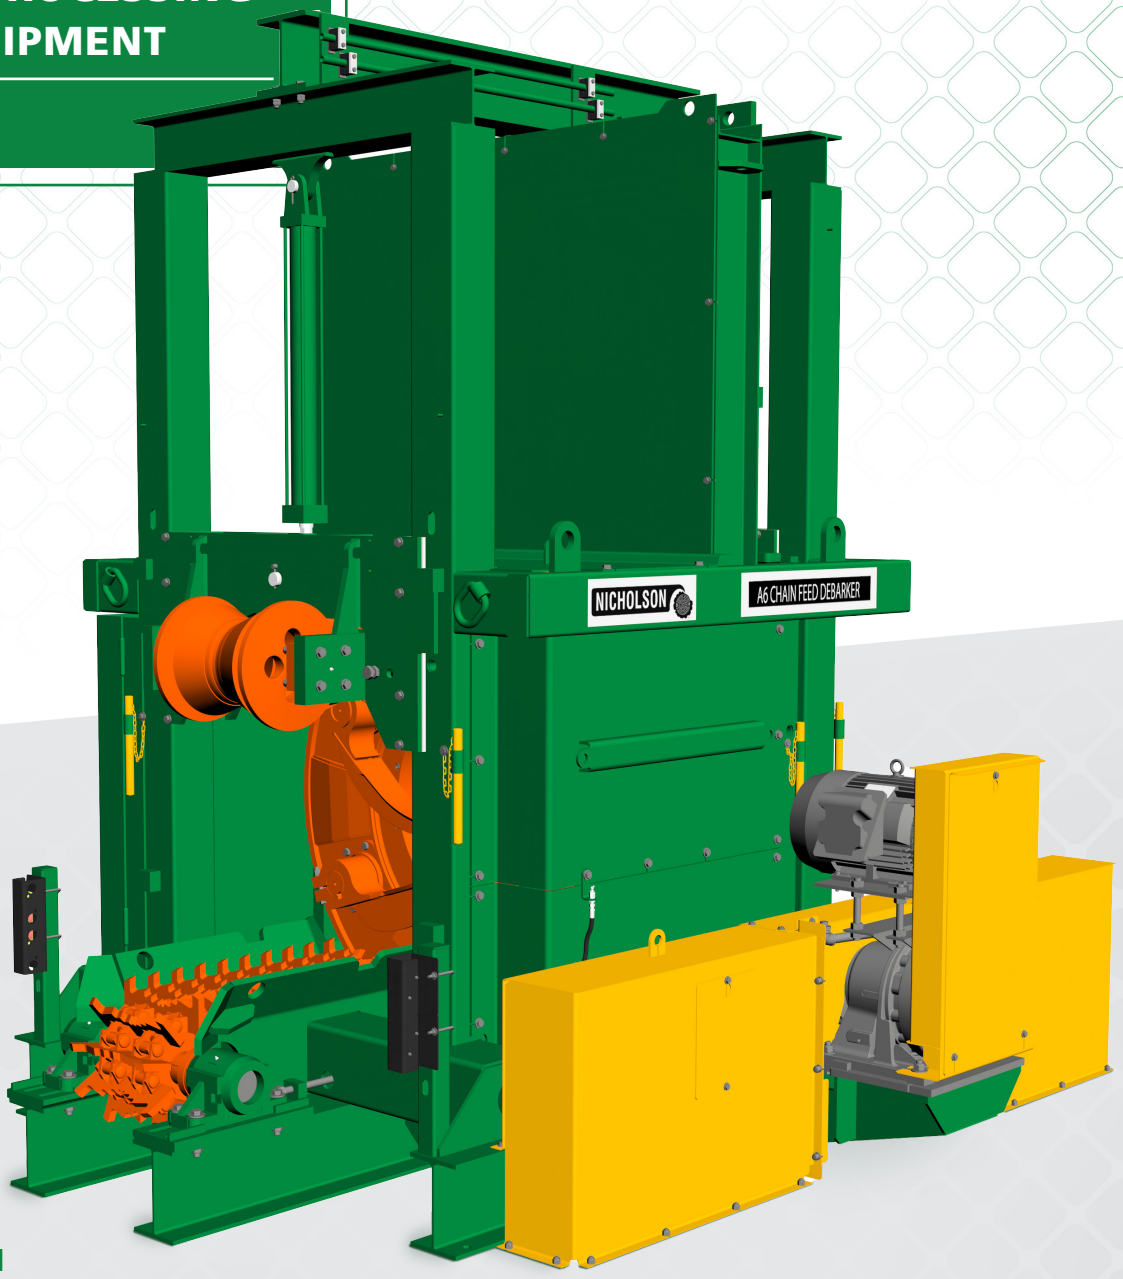

The Nicholson A6 is widely considered the industry standard for hardwood and softwood applications requiring low to medium debarking speeds.

The A6 is offered in a range of sizes and configurations. Nicholson's sales team has the experience to guide you through choosing the best options for your specific application.

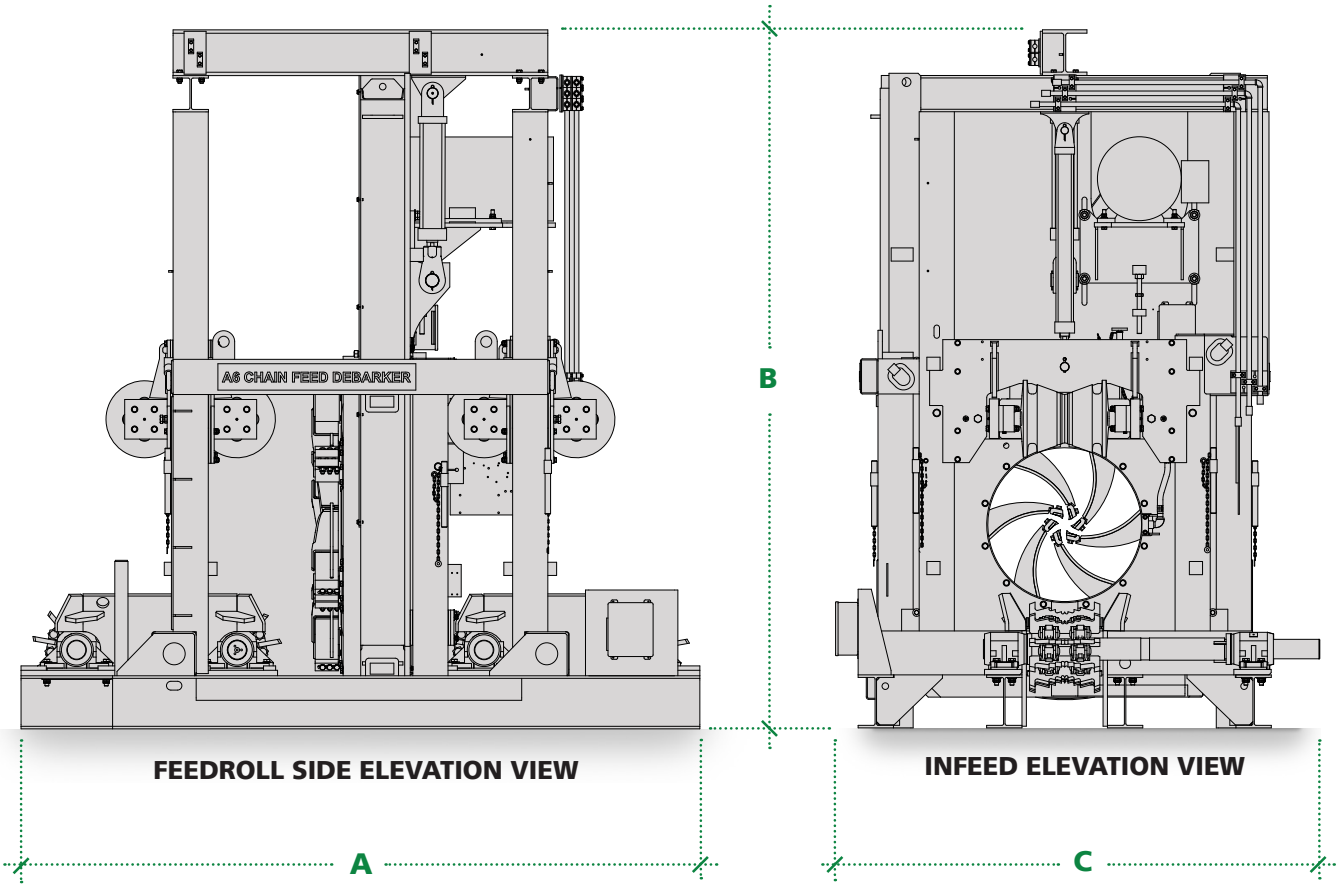

FEEDROLL SIDE ELEVATION VIEW

INFEED ELEVATION VIEW

TECHNICAL DATA	Units	22”	27”	35”	44”	
A	in (mm)	154 (3,912)	154 (3,912)	154 (3,912)	154 (3,912)	
B	in (mm)	159 (4,039)	159 (4,039)	159 (4,039)	186 (4,724)	
C	in (mm)	94 (2,388)	94 (2,388)	94 (2,388)	114 (2,896)	
Log diameter	in (mm)	3.5-20 (89-508)	3.5-25(89-635)	4.0-33 (102-838)	4.5-42 (114-1,067)	
Min. log length	in (m)	77 (1.96)	77 (1.96)	77 (1.96)	77 (1.96)	
Debarker weight	lbs (kg)	27,000 (12,273)	29,000 (13,182)	31,000 (14,091)	45,000 (20,455)	
Max. feed speed*	fpm (mpm)	175 (53)	155 (47)	150 (46)	120 (37)	

*Feed speed for optimal conditions. Consult with your Nicholson distributor for application specific feed speeds.
As all Nicholson product is subject to a continuous improvement program, specifications may change without prior notice.

NORTH AMERICA +1-844-227-5633 forestsales@nicholsonmfg.com +1-250-656-3111

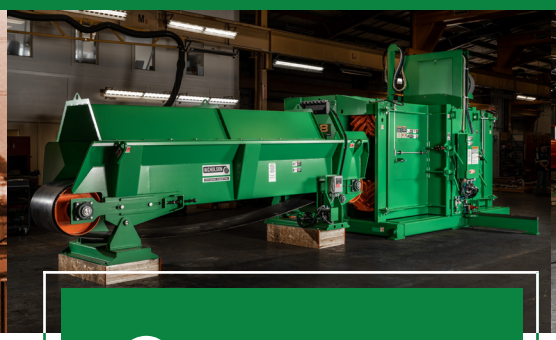

NICHOLSON MANUFACTURING LTD.
9896 Galaran Road
Sidney, BC, Canada V8L 4K4

NICHOLSON™

www.debarking.com

A6 Ring Debarker-1000 (CA EN) 01/2023
© 2023 Nicholson Manufacturing Ltd.
A Kadant Company